

HYDRUS 1.3

ULTRASONIC METER

DIEHL
Metering



APPLICATION

HYDRUS is a static water meter based on the ultrasonic technology. This technology enables accurate calculation of water consumption and eliminates measuring deviations caused by sand, suspended particles or air pockets.

FEATURES

- ▶ Long-term stability under difficult conditions
- ▶ Leak and pipe burst detection
- ▶ MID approval up to R=400 (cold water) and R=160 (hot water)
- ▶ No straight line required
- ▶ No measurement of air
- ▶ Insensitive to scale and sand
- ▶ Installation in any position
- ▶ Battery lifetime up to 16 years
- ▶ Available in cold water version and hot water version
- ▶ Available with integrated radio 434 or 868 MHz, M-Bus or pulse
- ▶ Data communication in Prios, Real data or Open Metering protocol (selectable OMS Generation 3 profile A or OMS Generation 4 profile B)

HYDRUS 1.3

ULTRASONIC METER

GENERAL

HYDRUS 1.3		
Medium temperature range	°C	+1 ... +50 (cold water) / +1 ... +90 (hot water)
Ambient operating temperature	°C	+1 ... +70
Ambient storage temperature	°C	-10 ... +70 (>35 °C max. 4 weeks)
Environmental class		O (Outdoors)
Mechanical environmental class		M2
Electromagnetic environmental class		E2
Nominal pressure	PN bar	16
Power supply		2 x 3.6 VDC lithium-batteries (only 1 battery with M-Bus possible)
Battery lifetime T30 ¹ /T50 ¹		Up to 12 years (1 battery), up to 16 years (2 batteries)
Battery lifetime T90 ¹		Up to 12 years (all interfaces)
Interfaces		Optical, radio (434 or 868 MHz), M-Bus, Pulse
Data storage		For events and consumption values
Protection class		IP 68

¹ depends on the sending interval of the radio telegram, the telegram length and the ambient temperature at the installation

TECHNICAL DATA DISPLAY

HYDRUS 1.3	
Display indication	LCD, 8-digit
Units DN 15 - DN 32	Flow and volume (m ³ + 3 digits after the decimal point)
Units DN 40 + DN 50	Flow (m ³ + 3 digits after the decimal point); Volume (m ³ + 2 digits after the decimal point)
Values displayed (depending on configuration)	Volume ² - flow - mediums temperature - display test ² - current error and alarm status ² - date - primary and secondary address - radio signal ON/OFF - battery lifetime ² - accounting day - error hour counter - pulse values - software checksum ²

² Display according to approval (always on)

INTERFACES

HYDRUS 1.3	
Optical	For configuration of display information and radio telegram, to switch to the various display loops
Radio	434 or 868 MHz, Prios, Real data, Open Metering Standard (OMS-Generation 3, Profile A, or OMS-Generation 4, Profile B, selectable)
M-Bus	2400 Baud (adjustable to 300 Baud), configurable telegram, cable length 1.5 m, power supply only via built-in battery
Pulse (Open collector)	2 configurable pulse outputs, cable length 1.5 m

VOLUME- / PULSE OPEN COLLECTOR

HYDRUS 1.3		
Max. input voltage	V	30
Max. input current	mA	27
Max. voltage drop at active output	V/mA	2/27
Max. current through inactive output	µA/V	5/30
Max. reverse voltage without destroying outputs	V	6
Pulse rates	I/pulse	Decadic 0.1 ... 100
Pulse output 1 variants		Total volume or forward volume
Pulse output 2 variants		Forward volume, direction ³ or error
Pulse duration		Depending on device configuration ⁴
Pulse break		Depending on device configuration ⁴
Pulse frequency		Depending on device configuration ⁴

³ when total volume on pulse output 1, only direction possible on pulse output 2

⁴ detailed description on request

Diehl Metering S.A.S. - Head Office - 67 rue du Rhône - BP 10160 - FR-68304 Saint-Louis Cedex - Phone: + 33 (0)3 89 69 54 00 - Fax: + 33 (0)3 89 69 72 20 - metering-France-info@diehl.com - www.diehl.com/metering
International Sales - 67 rue du Rhône - BP 10160 - FR-68304 Saint-Louis Cedex - Phone: + 33 (0)3 89 69 54 21 - Fax: + 33 (0)3 89 69 54 22 - metering-France-export@diehl.com
Subject to technical adjustments.

HYDRUS 1.3

ULTRASONIC METER

REACH

Information pursuant to Article 33 (1) of Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006:

This product series contains articles with the following substances in a concentration of more than 0.1% weight by weight (w/w):

- Lead (CAS no.: 7439-92-1)
- Lead titanium zirconium oxide (CAS no.: 12626-81-2)

HYDRUS 1.3^{DN 15 - 20}

ULTRASONIC METER

TECHNICAL DATA*


Nominal diameter	DN	mm	15	15	15	20	20
Nominal flow rate	Q ₃	m ³ /h	2.5	2.5	2.5	4	4
Overall length	L	mm	110	165	170	130	190
Overload flow rate	Q ₄	m ³ /h	3.125	3.125	3.125	5	5
Transitional flow rate	Q ₂	l/h	16	16	16	25.6	25.6
Minimum flow rate	Q ₁	l/h	10	10	10	16	16
Starting flow rate		l/h	2.6	2.6	2.6	4.3	4.3
Pressure loss at Q ₃		bar	0.33	0.33	0.33	0.3	0.3

* at dynamic range R=250 / further overall lengths on request

APPROVAL

		DN 15 - 20
Approval		MID LNE 14586 OIML R49 EN 14154 TVO KTW ACS WRAS
Dynamic range (Q ₃ /Q ₁) - Q ₃ 2.5 m ³ /h (T30 - T50)	R	160 / 200 / 250 / 315 / 400
Dynamic range (Q ₃ /Q ₁) - Q ₃ 4 m ³ /h (T30 - T50)	R	160 / 200 / 250 / 315 / 400
Dynamic range (Q ₃ /Q ₁) - Q ₃ 1.6 - 4 m ³ /h (T90)	R	160 / 200

DIMENSIONS

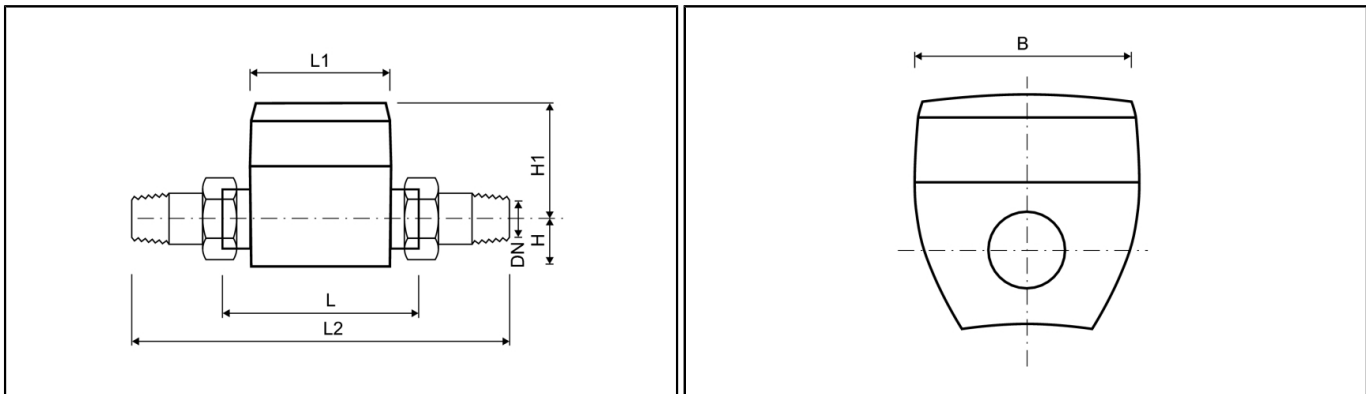


Nominal diameter	DN	mm	15	15	15	20	20
Nominal flow rate	Q ₃	m ³ /h	2.5	2.5	2.5	4	4
Overall length	L	mm	110	165	170	130	190
Counter length	L1	mm	88	88	88	88	88
Counter width	B	mm	94	94	94	94	94
Overall length with coupling	L2	mm	190	245	250	230	290
Connection thread on meter		inch	G ³ / ₄ B	G ³ / ₄ B	G ³ / ₄ B	G1B	G1B
Connection thread of coupling		inch	R ¹ / ₂	R ¹ / ₂	R ¹ / ₂	R ³ / ₄	R ³ / ₄
Height	H1	mm	67	67	67	65	65
Weight without coupling (approx.)		kg	0.8	1	1	0.9	1.1
Weight with coupling (approx.)		kg	1	1.2	1.4	1.3	1.5
Height	H	mm	32	32	32	34	34


HYDRUS 1.3^{DN 15 - 20}

ULTRASONIC METER

PRESSURE LOSS GRAPH / TYPICAL ERROR GRAPH

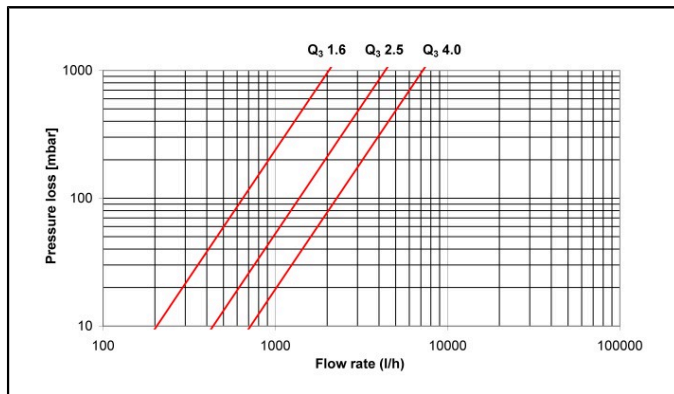

Pressure loss graph

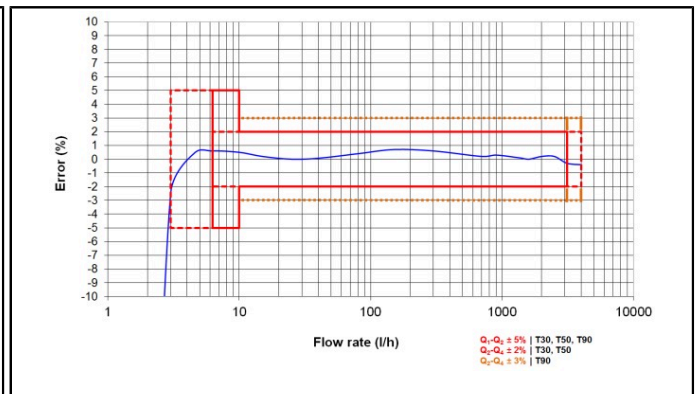

Typical error graph

HYDRUS 1.3^{DN 25 - 50}

ULTRASONIC METER

TECHNICAL DATA*

Nominal diameter	DN	mm	25	32	25	32	
Nominal flow rate	Q ₃	m ³ /h	6.3	6.3	10	10	
Overall length	L	mm	260	260	260	260	
Overload flow rate	Q ₄	m ³ /h	7.87	7.87	12.5	12.5	
Transitional flow rate	Q ₂	l/h	50.4	50.4	80	80	
Minimum flow rate	Q ₁	l/h	31.5*	31.5	50*	50*	
Starting flow rate		l/h	10	10	10	10	
Pressure loss at Q ₃		bar	0.25	0.25	0.55	0.55	
Nominal diameter	DN	mm	40	40	50	50	50
Nominal flow rate	Q ₃	m ³ /h	10	16	16	25	25
Overall length	L	mm	300	300	270	270	300
Overload flow rate	Q ₄	m ³ /h	12.5	20	20	31.25	31.25
Transitional flow rate	Q ₂	l/h	80	128	128	200	200
Minimum flow rate	Q ₁	l/h	50	80*	80	125*	125
Starting flow rate		l/h	16	16	25	25	25
Pressure loss at Q ₃		bar	0.25	0.4	0.1	0.25	0.25

* at dynamic range R=200; for other dynamics please contact your Diehl Metering agency.

APPROVAL

		DN 25 - 50
Approval		MID LNE 14586 OIML R49 EN 14154 TVO KTW ACS WRAS
Dynamic range (Q ₃ /Q ₁) - Q ₃ 6.3 m ³ /h (T30 - T50)	R	40 / 80 ⁷ / 160 / 200
Dynamic range (Q ₃ /Q ₁) - Q ₃ 10 m ³ /h (T30 - T50)	R	40 / 80 ⁷ / 160 / 200 / 250
Dynamic range (Q ₃ /Q ₁) - Q ₃ 16 m ³ /h (T30 - T50)	R	40 / 80 / 160 / 200 / 250 / 315 ⁸ / 400 ⁸
Dynamic range (Q ₃ /Q ₁) - Q ₃ 25 m ³ /h (T30 - T50)	R	40 / 80 / 160 / 200 / 250 / 315 / 400
Dynamic range (Q ₃ /Q ₁) - Q ₃ 6.3 - 25 m ³ /h (T90)	R	40 / 80 / 160


⁷ variant DN 25 with body length 135 mm and 150 mm only in R 80

⁸ not for DN 50

HYDRUS 1.3 DN 25 - 50

ULTRASONIC METER

DIMENSIONS

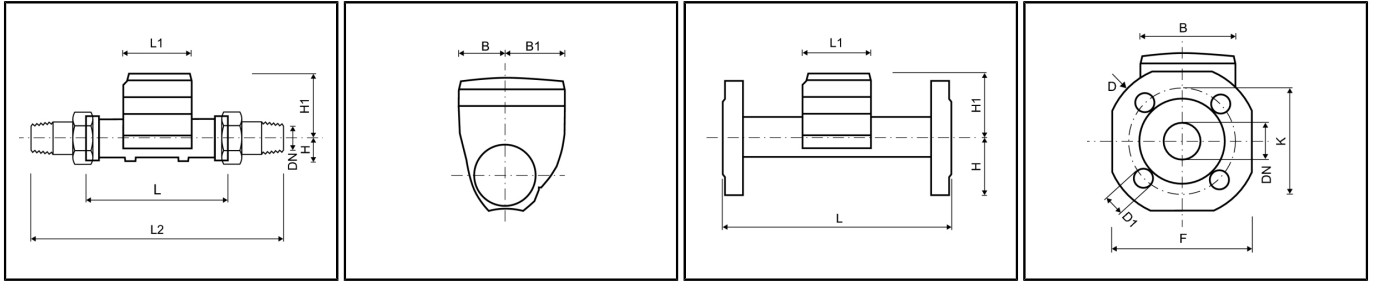


Nominal diameter	DN	mm	25	32	25	32	
Nominal flow rate	Q ₃	m ³ /h	6.3	6.3	10	10	
Overall length	L	mm	260	260	260	260	
Counter length	L1	mm	92	92	92	92	
Counter width	B	mm	94	94	94	94	
DIMENSIONS - THREAD							
Overall length with coupling	L2	mm	380	380	380	380	
Connection thread on meter		inch	G1¼B	G1½B	G1¼B	G1½B	
Connection thread of coupling		inch	R1	R1¼	R1	R1¼	
Height	H1	mm	84	84	84	84	
Weight without coupling (approx.)		kg	1.6	1.8	1.6	1.8	
Weight with coupling (approx.)		kg	2.2	2.4	2.2	2.4	
Height	H	mm	26	26	26	26	
DIMENSIONS - FLANGE							
Flange diameter	D	mm	115	140	115	140	
Hole circle diameter	K	mm	85	100	85	100	
Number of screwholes		pcs	4	4	4	4	
Screwhole diameter	D1	mm	14	18	14	18	
Height	H	mm	50	62.5	50	62.5	
Height	H1	mm	84	84	84	84	
Width	F	mm	100	125	100	125	
Weight with flanges (approx.)		kg	3.45	4.7	3.45	4.7	
Nominal diameter	DN	mm	40	40	50	50	50
Nominal flow rate	Q ₃	m ³ /h	10	16	16	25	25
Overall length	L	mm	300	300	270	270	300
Counter length	L1	mm	92	92	92	92	92
Counter width	B	mm	94	94	94	94	94
DIMENSIONS - THREAD							
Overall length with coupling	L2	mm	440	440	390	390	420
Connection thread on meter		inch	G2B	G2B	G2½B	G2½B	G2½B
Connection thread of coupling		inch	R1½	R1½	R2	R2	R2
Height	H1	mm	87	87	90	90	90
Weight without coupling (approx.)		kg	3.05	3.05	3.9	3.9	4.05
Weight with coupling (approx.)		kg	4.25	4.25	5.5	5.5	5.65
Height	H	mm	31	31	41	41	41
DIMENSIONS - FLANGE							
Flange diameter	D	mm	148	148	163	163	163
Hole circle diameter	K	mm	110	110	125	125	125
Number of screwholes		pcs	4	4	4	4	4
Screwhole diameter	D1	mm	18	18	18	18	18
Height	H	mm	69	69	73.5	73.5	73.5
Height	H1	mm	87	87	90	90	90
Width	F	mm	138	138	147	147	147
Weight with flanges (approx.)		kg	6.67	6.67	7.23	7.23	7.47

Diehl Metering S.A.S. - Head Office - 67 rue du Rhône - BP 10160 - FR-68304 Saint-Louis Cedex - Phone: + 33 (0)3 89 69 54 00 - Fax: + 33 (0)3 89 69 72 20 - metering-france-info@diehl.com - www.diehl.com/metering
 International Sales - 67 rue du Rhône - BP 10160 - FR-68304 Saint-Louis Cedex - Phone: + 33 (0)3 89 69 54 21 - Fax: + 33 (0)3 89 69 54 22 - metering-france-export@diehl.com
 Subject to technical adjustments.


HYDRUS 1.3^{DN 25 - 50}

ULTRASONIC METER

PRESSURE LOSS GRAPH / TYPICAL ERROR GRAPH

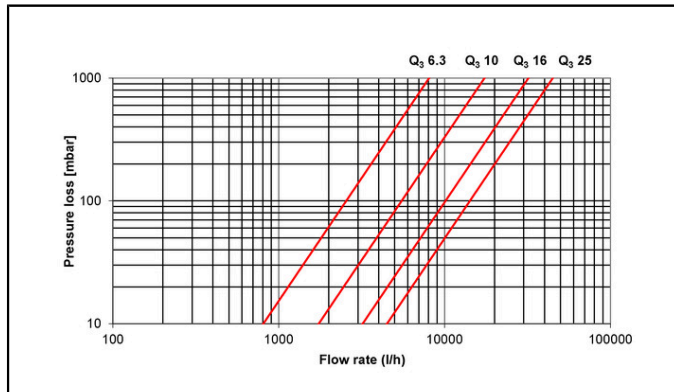

Pressure loss graph

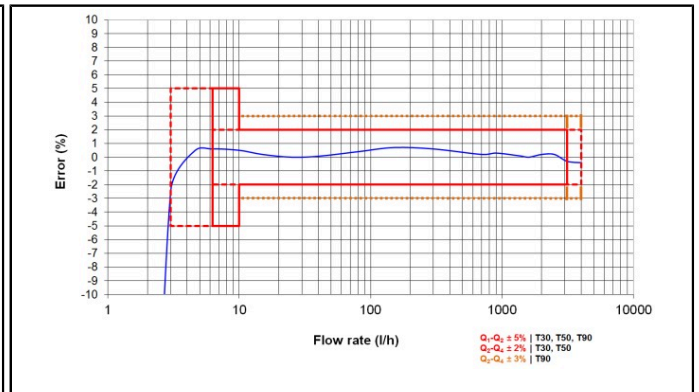

Typical error graph