

Data sheet

**MULTICAL® 303**

**All-round heat and cooling meter, easy to install and easy to use**

- Fully programmable data logger with minute logger
- Configurable M-Bus and Wireless M-Bus with logger reading
- On-site configurable between inlet and outlet
- Dynamic range of up to 1500:1 from start to saturation flow
- Low pressure loss – all flow sizes below 0.1 bar
- PN16/PN25 metal flow sensor – approved for up to 130 °C
- Battery lifetime of up to 16 years
- 7- or 8-digit display resolution



MID 2014/32/EU




EN 1434

DK-BEK 1178 – 06/11/2014



EN 1434

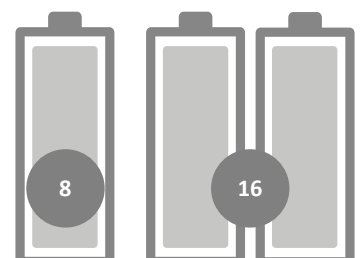

## Contents

---

Description	3
Mechanical design	4
Mechanical data	5
Approved meter data	6
Accuracy	7
Pressure loss	8
Dimensioned sketches	9
Electrical data	11
Product variants	12
Meter configuration	13
Information codes in display	14
Accessories	15

## Description

---

### Application

MULTICAL® 303 is the compact all-round heat and cooling meter that can be installed everywhere due to its minimum dimensions. The meter can be turned during installation, even in the most compact systems, enabling you to always obtain optimal reading of the display.

The robust metal flow sensor tolerates continuous temperatures of up to 130 °C, is effectively protected against condensation and can be used in both PN16 and PN25 installations.

The flow sensor is constructed with Kamstrup's unique ultrasonic technique that ensures an extremely long lifetime – also in magnetite-containing heating systems.

### Functionality

MULTICAL® 303 consists of a flow sensor based on ultrasound, an electronic display unit and a Pt500 sensor set. These components are separately calibrated and then assembled to one heat, cooling or combined heat/cooling meter. If the components are separated, a reverification of the meter is required.

The meter has built-in, programmable data logger that stores all relevant registers. Standard data logger registers are stored for 20 years, 36 months, 460 days and 1400 hours.

During installation, the meter can be configured for installation of the flow sensor in either inlet or outlet pipe. Furthermore, the energy unit and resolution as well as date/time and M-Bus address can be adjusted merely by pressing a button – no special tools needed.


### M-Bus or Wireless M-Bus

MULTICAL® 303 can be delivered with factory-mounted cable for M-Bus or with Wireless M-Bus in mode C1 or T1 according to EN 13757.

The M-Bus communication is galvanically separated and has auto-select 300/2400 baud, primary/secondary addressing and collision detection. The current consumption is 1 unit load, and separate registers for heat and cooling energy are read.

The Wireless M-Bus data communication follows the European standard EN 13757, and the data telegram is configurable for either mode C1, T1/C1 BSI or T1/C1 OMS. The data communication is 128 bit AES-encrypted.

**Mechanical design**

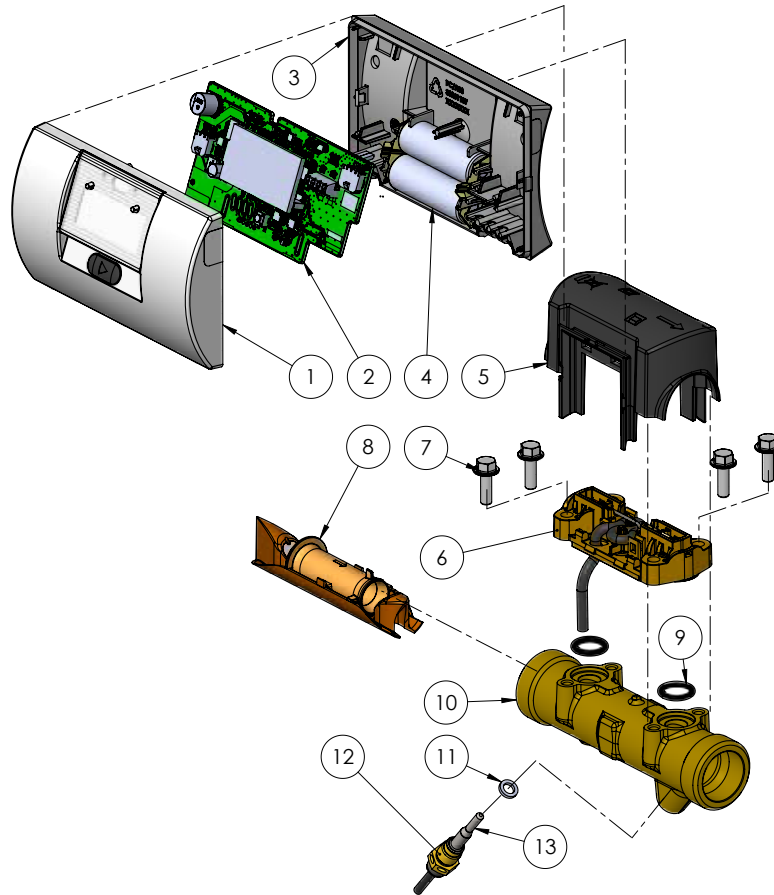

1. Top cover with front key and laser engraving
2. PCB with microcontroller, flow-ASIC, display, etc.
3. Base cover (may only be opened by an authorised laboratory)
4. One or two A-cell batteries
5. Flow sensor cover (may only be opened by an authorised laboratory)
6. Piezo cell console
7. Screws for piezo cell console
8. Ultrasound measuring tube
9. O-rings, piezo cells
10. Brass casing
11. O-ring, temperature sensor
12. Union, temperature sensor
13. Temperature sensor [ø5,0 - ø5,2 - DS 27,5]

## Mechanical data

---

Ambient temperature 5...55 °C. Non-condensing, closed location (indoor installation)

Protection class

– Calculator IP65  
– Flow sensor IP68

Media temperatures

– Heat meters 303-W 2...130 °C  
– Cooling meters 303-C 2...50 °C  
– Heat/cooling meters 303-T 2...130 °C

At media temperatures below the ambient temperature or above 90 °C, wall-mounting of the calculator is recommended.

Medium in flow sensor Water (district heating water as described in AGFW FW510)

Storage temperature -25...60 °C (drained flow sensor)

Pressure stage PN16/PN25, PS25

Weight From 0.7 to 0.8 kg depending on the flow sensor size

Flow sensor cable 1.5 m (the cable is non-detachable)

Temperature sensor cables 1.5 m or 3 m (the cables are detachable, reverification required)

## Materials

Wetted parts

– Flow sensor casing Hot forged, dezincification-resistant brass (CW 602N)  
– Transducer Stainless steel, w.nr. 1.4404  
– O-rings EPDM  
– Measuring tube Thermoplastic, PES 30 % GF  
– Reflectors Thermoplastic, PES 30 % GF and stainless steel, w.nr. 1.4306

Flow sensor cover Thermoplastic, PC 20 % GF

Wall bracket Thermoplastic, PC 20 % GF

Calculator casing

– Top Thermoplastic, PC 10 % GF with TPE (thermoplastic elastomer)  
– Base Thermoplastic, PC/ABS

Cables

– Flow sensor Silicone cable with inner Teflon insulation  
– Temperature Silicone cable with inner Teflon insulation  
– M-Bus PVC cable

**Approved meter data**


Approvals		
- Heat meter	DK-0200-MI004-045	The stated minimum temperatures only relate to the type approval. The meter has no cut-off for low temperature and thus measures down to 0.01 °C and 0.01 K.
- Temperature range	θ: 2 °C...180 °C	
- Differential range	Δθ: 3 K...178 K	
- Cooling meter	TS 27.02 015	
- Temperature range	θ: 2 °C...180 °C	
- Differential range	Δθ: 3 K...178 K	
- Bifunctional heat/cooling meter	Marked with DK-0200-MI004-045 and TS 27.02 015 as well as MID year mark	
- Temperature range	θ: 2 °C...180 °C	
- Differential range	Δθ: 3 K...178 K	
Standards	EN 1434:2007/AC:2007 EN 1434:2015+A1:2018 FprEN 1434:2022 from 2022-04	
EU directives	Measuring Instruments Directive Low Voltage Directive Electromagnetic Compatibility Directive Radio Equipment Directive RoHS Directive Pressurised equipment Directive	
EN 1434 designation	Environmental class A	
MID designation		
- Mechanical environment	Class M1 and M2	
- Electromagnetic environment	Class E1, non-condensing environment, closed location (indoors), 5...55°C	
Temperature sensor connection		
- Type 303-W/C/T	Pt500 – EN 60751, 2-wire connection (the cables are detachable, reverification required)	

Type number	Nom. flow q <sub>p</sub> [m <sup>3</sup> /h]	Max flow q <sub>s</sub> [m <sup>3</sup> /h]	Min. flow		Dynamic range		"Min. flow cut-off" [l/h]	Saturation flow [m <sup>3</sup> /h]	Pressure loss Δp @ q <sub>p</sub> [bar]	Threaded connection on meter	Length [mm]
			100:1 q <sub>i</sub> [l/h]	250:1 q <sub>i</sub> [l/h]	[q <sub>p</sub> :q <sub>i</sub> ]	[q <sub>p</sub> :q <sub>i</sub> ]					
303-x-10	0.6	1.2	6	-	100:1	-	3	1.5	0.03	G¾B	110
303-x-40	1.5	3	15	6	100:1	250:1	3	4.6	0.09	G¾B	110
303-x-70	1.5	3	15	6	100:1	250:1	3	4.6	0.09	G1B	130
303-x-A0	2.5	5	25	10	100:1	250:1	5	7.6	0.09	G1B	130

## Accuracy

Meter components	MPE according to EN 1434-1	MULTICAL® 303, typical accuracy
Flow sensor	$E_f = \pm [2 + 0.02 q_p/q] \%$	$E_f = \pm [1 + 0.01 q_p/q] \%$
Calculator	$E_c = \pm [0.5 + \Delta\Theta_{min.}/\Delta\Theta] \%$	$E_c = \pm [0.15 + 2/\Delta\Theta] \%$
Sensor set	$E_t = \pm [0.5 + 3 \Delta\Theta_{min.}/\Delta\Theta] \%$	$E_t = \pm [0.4 + 4/\Delta\Theta] \%$

Total typical accuracy of MULTICAL® 303 compared to EN 1434-1

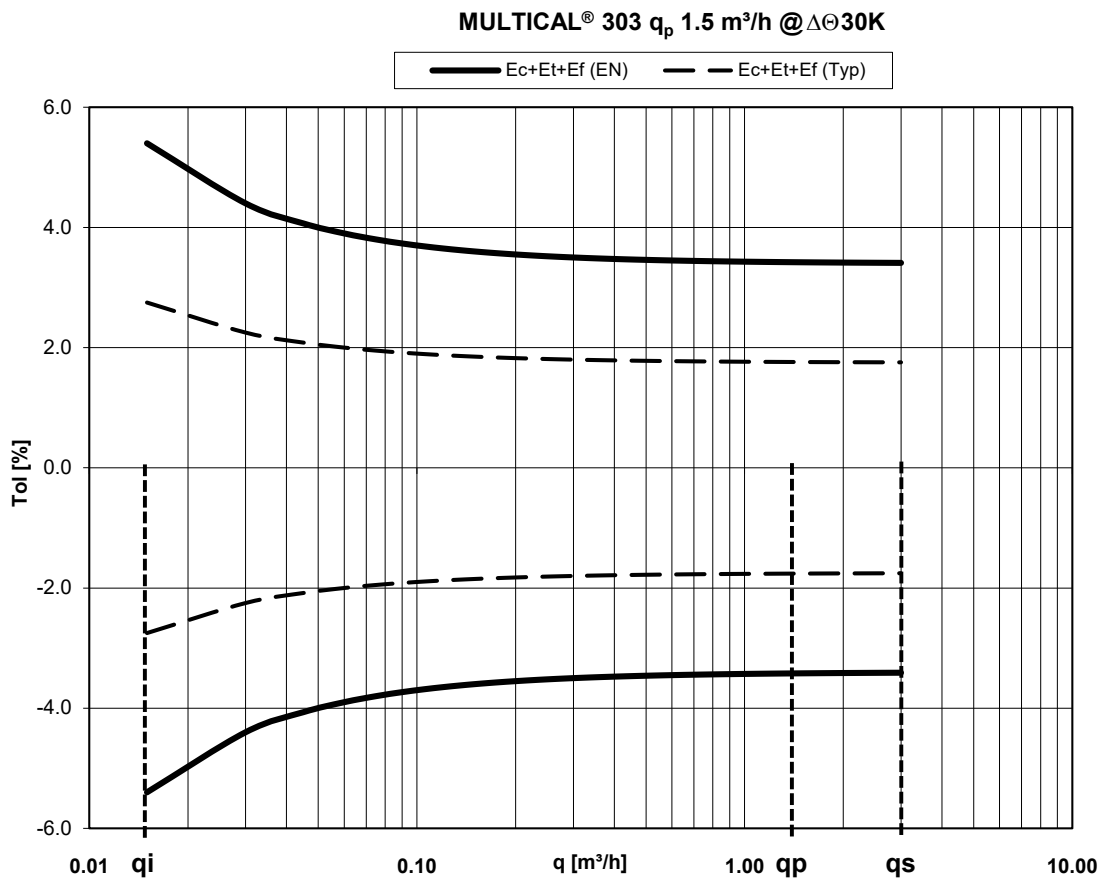


## Pressure loss

The pressure loss in a flow sensor is stated as the maximum pressure loss at  $q_p$ .  
 According to EN 1434, the maximum pressure loss must not exceed 0.25 bar.

Graph	$q_p$ [m³/h]	Installation dimensions	Nom. diameter [mm]	$\Delta p@q_p$ [bar]	$k_v$	$q@0.25 \text{ bar}$ [m³/h]
A	0.6	G½B x 110 mm	DN15	0.03	3.46	1.7
B	1.5	G½B x 110 mm	DN15	0.09	4.89	2.4
B	1.5	G1 x 130 mm	DN 20	0.09	4.89	2.4
C	2.5	G1 x 130 mm	DN 20	0.09	8.15	4.1

$\Delta p$  MULTICAL® 303

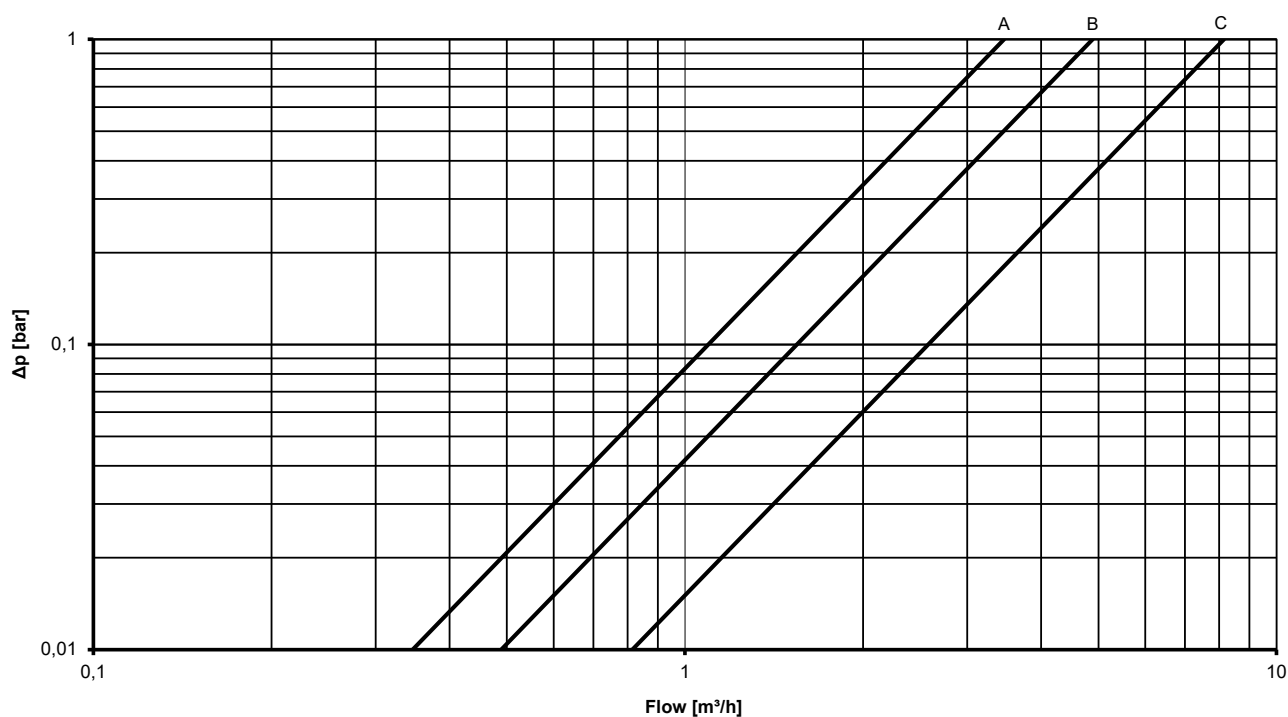





Dimensioned sketches

All measurements in [mm]


Calculator

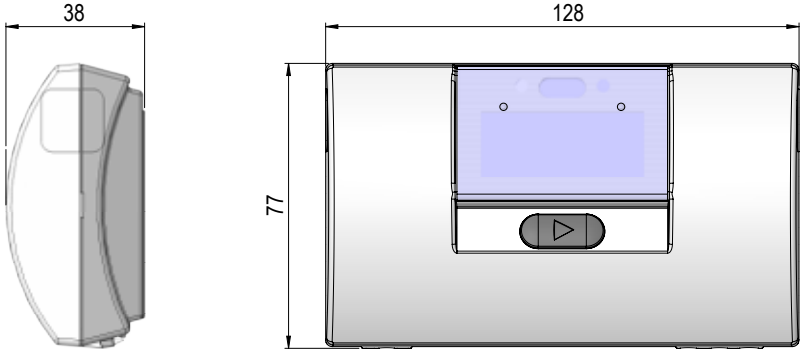


Complete MULTICAL® 303 with calculator mounted on flow sensor



Calculator mounted with wall bracket

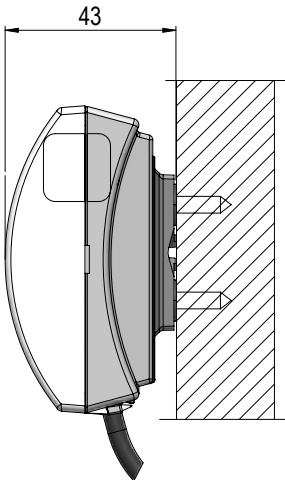


Wall bracket for calculator

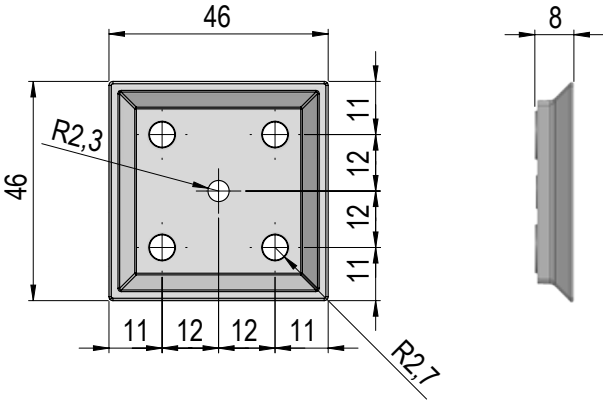


**Dimensioned sketches**


**Direct short temperature sensor**

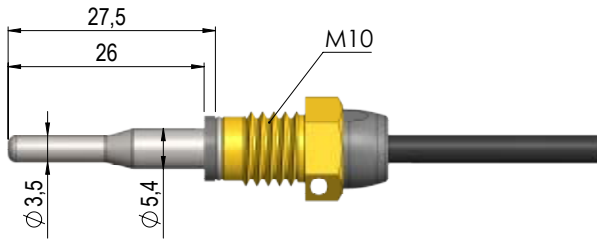

**Pocket temperature sensor with composite union**

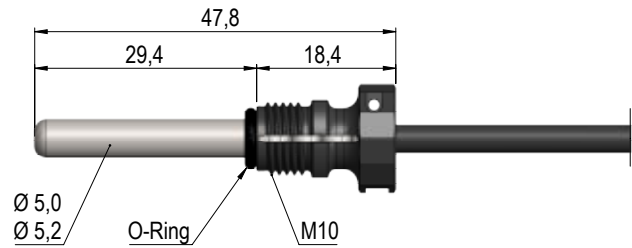

**Flow sensor**

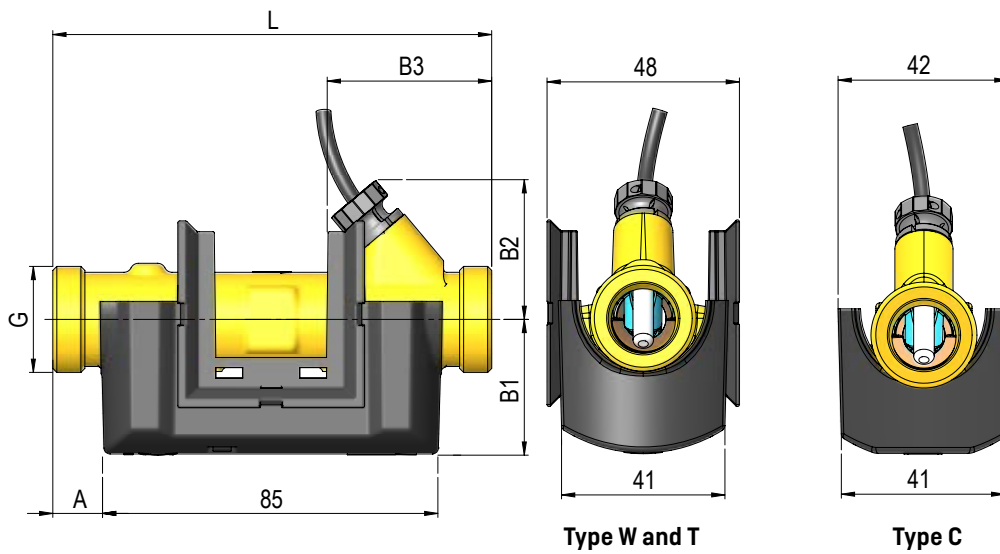

Thread	L [mm]	A [mm]	B1 [mm]	B2 [mm]	B3 [mm]	Approx. weight [kg] *
G½B (R½)	110	12	35	35	40	0.7
G1B (R¾)	130	22	38	38	50	0.8

\* The weight indication includes the complete meter including flow sensor, calculator, sensor set and 2 x A-batteries. Any provided accessories such as couplings, nipples and sensor pockets as well as packaging are not included in the weight indication.

## Electrical data

---

### Calculator data

Display	LCD – 7 or 8 digits with a digit height of 6.8 mm	
Resolution	9999.999 – 99999.99 – 999999.9 – 9999999 99999.999 – 999999.99 – 9999999.9 – 99999999	
Energy units	MWh – kWh – GJ	
Data logger (EEPROM)		
– Logger contents	Programmable - all registers can be selected	
– Logging interval	Programmable - from 1 minute to 1 year	
– Logging depth	Programmable - standard: 20 years, 36 months, 460 days, 1400 hours (RR-code = 10)	
Info logger (EEPROM)	50 info codes (50 latest are shown in the display)	
Clock/calendar	Clock, calendar, leap year compensation, target date	
Daylight saving time/wintertime (DST)	Programmable The function can be disabled so that “technical normal time” is used	
Clock accuracy	Without external adjustments: Less than 15 minutes/year With external adjustment every 48 hours: Less than 7 s from legal time	
Data communication	KMP protocol with CRC16 is used for optical communication	
M-Bus	Protocol according to EN 13757-3:2018, 300 and 2400 baud communication speeds with automatic baudrate detection. Current consumption: 1 unit load (1.5 mA). Fixed 2-wire cable. Polarity independent.	
Wireless M-Bus	Mode C1 protocol according to EN 13757-4:2019. Individual 128 bit AES-encryption. Transmission interval: 16 s. / 96 s. / 15 m. Transmission frequency: 868.95 MHz Mode T1/C1 BSI protocol according to EN13757-4:2019 and OMS Specification Volume 2 issue 4.2.1. Individual 128 bit AES encryption, security profile B. Transmission interval: 16 s. / 96 s. / 15 m. Transmission frequency: 868.95 MHz Mode T1/C1 OMS protocol according to EN13757-4:2019 and OMS Specification Volume 2 issue 4.2.1. Individual 128 bit AES encryption, security profile A. Transmission interval: 16 s. / 96 s. / 15 m. Transmission frequency: 868.95 MHz	
Power in temperature sensors	< 0.4 $\mu$ W RMS “normal mode” / < 2 $\mu$ W RMS “fast mode”	
Supply voltage	3.65 VDC $\pm$ 0.1 VDC	
EMC data	Complies with EN 1434 class A (MID class E1)	
<b>Battery</b>	3.65 VDC, 1 x A-cell lithium	3.65 VDC, 2 x A-cell lithium
Life*	Up to 8 years @ $t_{BAT} < 30$ °C	Up to 16 years @ $t_{BAT} < 30$ °C
Lithium contents	Approx. 0.9 g	2 x approx. 0.9 g
Transport category	Not included in the rules of dangerous goods	

\* The battery lifetime is affected by the meter's communication and setup parameters as well as transmission interval, transmission power and datagram contents.

Product variants

MULTICAL® 303 type number	Static data Written on the front of the meter 303-x-xx-x-xx				Dynamic data Shown in the display xx-x-xx			
	Type 303	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Sensor connection</b>								
Pt500 Heat meter	W							
Pt500 Heat/cooling meter	T							
Pt500 Cooling meter	C							
<b>Flow sensor<sup>1)</sup></b>								
q <sub>p</sub> [m <sup>3</sup> /h]	Connection	Length [mm]	Dynamic range					
0.6	G½B (R½)	110	100:1	10				
1.5	G½B (R½)	110	100:1	40				
1.5	G1B (R¾)	130	100:1	70				
2.5	G1B (R¾)	130	100:1	A0				
<b>Meter type</b>								
Heat meter (MID module B+D)				2				
Heat/cooling meter (MID module B+D & TS27.02+DK268) <sup>2)</sup>	θ <sub>hc</sub> = OFF			3				
Heat meter, National approvals				4				
Cooling meter (TS27.02+DK268)				5				
Heat/cooling meter (MID module B+D & TS27.02+DK268) <sup>2)</sup>	θ <sub>hc</sub> = ON			6				
<b>Country code</b>								
Determined by Kamstrup upon receipt of order					XX			
<b>Temperature sensor set (Pt500)</b>								
	Length [mm]	Diameter Ø [mm]	Cable length [m]					
Direct short temperature sensors	27.5	-	1.5	51				
Direct short temperature sensors	27.5	-	3.0	52				
Ø5.0 with composite unions	-	5.0	1.5	61				
Ø5.0 with composite unions	-	5.0	3.0	62				
Ø5.2 with composite unions	-	5.2	1.5	71				
Ø5.2 with composite unions	-	5.2	3.0	72				
<b>Supply<sup>3)</sup></b>								
Battery, 1 x A-cell	Battery lifetime of up to 8 years			1				
Battery, 2 x A-cells	Battery lifetime of up to 16 years			9				
<b>Communication</b>								
M-Bus, configurable								20
Wireless M-Bus, configurable 868.95 MHz EU								30

- The flow sensors are type-approved for the dynamic ranges q<sub>p</sub>;q<sub>r</sub> = 250:1 and 100:1, but are as standard delivered as 100:1. Please contact Kamstrup A/S for further information.
- In some countries bi-functional meters type 3 and 6 are only allowed to be assigned with the MID marking, due to national law.
- The battery lifetime is affected by the meter's communication and setup parameters as well as transmission interval, transmission power and data-gram contents. Please contact Kamstrup A/S for calculations of specific configurations.

## Meter configuration

	A	B	CCC	DDD	L	RR	T	VVV	XXX	YY	ZZZ
<b>Flow sensor position</b>											
Inlet		3									
Outlet		4									
<b>Measure</b>											
GJ		2									
kWh		3									
MWh		4									
<b>Flow sensor coding</b>											
Normal/high resolution [7 digits]			4xx								
High resolution [8 digits]			5xx								
<b>Display</b>											
Heat meter				210							
Heat/cooling meter				310							
Cooling meter				510							
<b>Integration mode</b>											
Adaptive mode [4-64 s]					5						
Normal mode [32 s]					6						
Fast mode [4 s]					7						
<b>Data logger profile</b>											
Standard data logger profile						10					
<b>Encryption level</b>											
Individual key							3				
<b>Customer label</b>											
Serial number								xxxx			
<b>Communication configuration</b>											
<b>Communication hardware</b>											
M-Bus [selection in type number]									x20		
Wireless M-Bus [selection in type number]									x30		
<b>System configuration (wM-Bus)</b>											
See the technical description - 5512-2701										YY	
<b>Datagram (M-Bus/wM-Bus)</b>											
See the technical description - 5512-2701											ZZZ

Please contact Kamstrup A/S for further information on configuration options.

## Information codes in display

Display digit								Description
1	2	3	4	5	6	7	8	
Info	t1	t2	0	V1	0	0	0	
1								Supply voltage is missing
2								Low battery level
	1							t1 above measuring range or disconnected
		1						t2 above measuring range or disconnected
	2							t1 below measuring range or short-circuited
		2						t2 below measuring range or short-circuited
	9	9						Invalid temperature difference (t1-t2)
				3				V1 Air
				4				V1 Wrong flow direction
				6				V1 > q <sub>s</sub> for more than one hour
<b>Example:</b>								
1	0	2	0	0	0	0	0	

**Note:** Infocodes are configurable. It is thus not certain that all parameters are available in a given MULTICAL® 303. An info logger stores the info code each time the info code is changed. It is possible to read the latest 50 changes of the info code as well as the date of the change.

## Accessories

---

Type number	Description
3026-655.A	Wall bracket including rawplugs and screws
6699-099	Infrared optical read-out head with USB plug
6696-005	Optical read-out head with Bluetooth
3026-909	Holder for optical read-out head
669-042	Metal plate for optical read-out head, 20 pcs.
3130-262	Blind plug including O-ring for the temperature sensor connecting in the flow sensor
2210-061	Gasket for flow sensor G $\frac{3}{4}$ B (R $\frac{1}{2}$ ) / coupling 6561-323
2210-062	Gasket for flow sensor G1B (R $\frac{3}{4}$ ) / coupling 6561-324
2105-002	Sealing cap for flow sensor G $\frac{3}{4}$ B (R $\frac{1}{2}$ ), blue
3026-1148	Sealing cap for flow sensor G $\frac{3}{4}$ B (R $\frac{1}{2}$ ), self-locking, blue
6556-491	R $\frac{1}{2}$ - M10 nipple for direct short temperature sensor
6556-492	R $\frac{3}{4}$ - M10 nipple for direct short temperature sensor
6556-474	G $\frac{1}{2}$ B ball valve with M10x1 sensor socket, 48 mm
6556-475	G $\frac{3}{4}$ B ball valve with M10x1 sensor socket, 54 mm
3026-517	Sealing cap for direct short temperature sensor DS27,5, blue
3026-518	Sealing cap for direct short temperature sensor DS27,5, red
3026-1034	Sealing cap for $\varnothing$ 5.0 mm / $\varnothing$ 5.2 mm temperature sensor with composite union, black

For further information on MULTICAL® 303 and its accessories, please refer to the technical description, which you can find on [Kamstrup Product Centre](#).

MULTICAL® 303

---

**Kamstrup A/S**

Industrivej 28, Stilling  
DK-8660 Skanderborg  
T: +45 89 93 10 00  
info@kamstrup.com  
kamstrup.com